
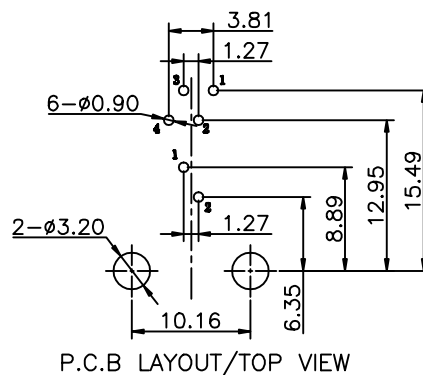

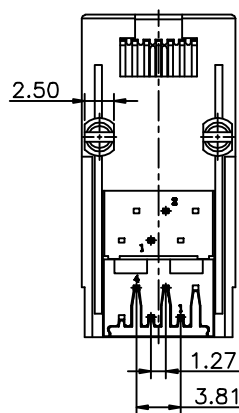


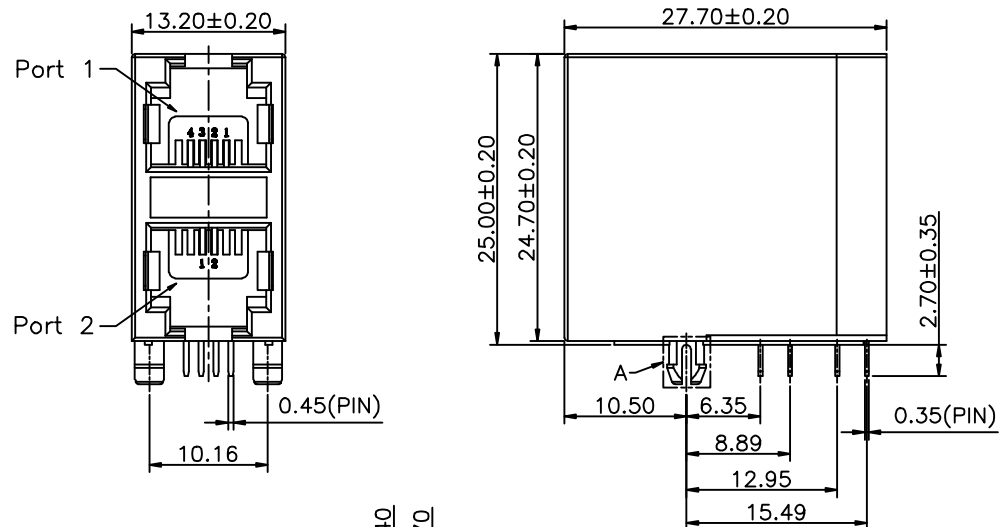

SPECIFICATION:

Electrical:

Current Rating:1.5Amp max @25℃
Voltage Rating:150VAC max
Insulation Resistance:500 megohms min
Contact Resistance:30 milliohms max
Withstanding Voltage:1000 VAC

Mechanical:

Durability: 750 Cycles
Operating Temperature: -40℃~+70℃
Storage Temperature: -50℃~+75℃
Contact Normal Force:100g Minimum

Material:

Housing: Thermoplastic UL94V-0,PBT
Contact: T=0.35mm Phosphor Bronze C5210-EH,
Gold Plating Over Ni 50u" In Contact,
Tin 100u" Plating Over Ni 50u" In Solder

Area.

Soldering Temperature: 260+/-5℃,5sec/95%Area be covered

Withstand Temperature: 230+/-5℃,5sec No stick tin melting phenomenon

UL No: E234095

Part No.:

PJ-D1-KZ00-N5003-F

6-Ø0.90 Contact
PLASTIC MATERIAL
PLASTIC COLOR
00:Black
NO SHIELD, NO MARK
Plated Gold
P18u" Minum
5003:RJ11 TYPE,
Part 1:6P4C Part 2:6P2C

Drawing No.:PJ-D1-KZ00-N5003-F-A0

REVISIONS				
REV	ECO	DESCRIPTION	DATE	BY

TOLERANCE	SIGNATURES	DATE
8° ANGLE X .XX .XXX	DESIGN: samir	21.01.06
±0.5° ±0.25 ±0.15 ±0.10	CHECKED:	
	APPROVAL:	
	SCALE	UNIT
	1:1	mm
		REV
		A/01

HUNTER		捷拓科技股份有限公司 東莞行特電子有限公司	
TITLE	RJ11 2*1 Ports W/O SHIELD		
PART NO.	PJ-D1-KZ00-N5003-I		