
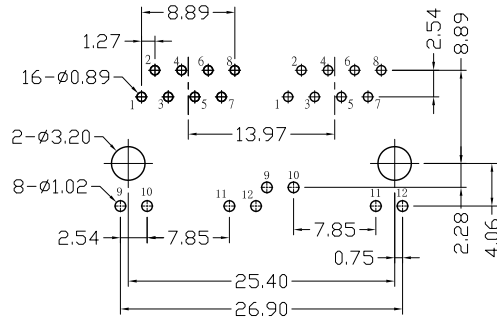
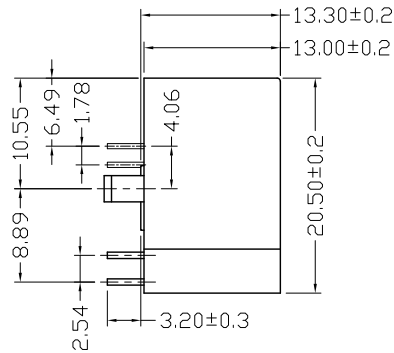
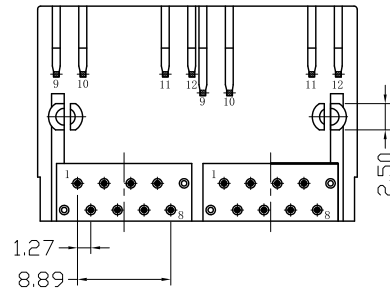





PCB LAYOUT TOP VIEW

SPECIFICATION:

Electrical:

Current Rating:1.5Amp max @25°C

Voltage Rating:150VAC max

Insulation Resistance:500 megohms min

Contact Resistance:30 milliohms max

Withstanding Voltage:1000 VAC

Mechanical:

Durability:750 Cycles

Operating Temperature:-40°C~+70°C

Storage Temperature:-50°C~+75°C

Contact Normal Force:100g Minimum

Material:

Housing:High Temperature Thermoplastic UL94V-0,PA6T

Contact:0.45mm Dia Phosphor Bronze Plated Gold Over Ni

Soldering Temperature: 260+/-5°C,5sec/95%Areabe covered

Withstand Temperature: 270+/-5°C,5sec No stick tin melting phenomenon

UL No: E234095

Part No. :

PJ-C2-BX02-E1054-1

B:10Point 8Contact
Housing Material
Plastic Color
02:Yellow 114C
Plated Gold
1:F μ"
1054:左綠右黃燈
E:全塑 HTC mark

10 (Green)
9 +

12 (Yellow)
11 +

Drawing No: PJ-C2-BX02-E1054-1-01

REVISIONS

REV	ECO	DESCRIPTION	DATE	BY

TOLERANCE		SIGNATURES		DATE
.ANGLE	±0.5°	DESIGN:	samir	18.04.28
.X	±0.25	CHECKED:		
.XX	±0.15	APPROVAL:		
.XXX	±0.10	SCALE	UNIT	REV
		FREE	MM	A/01

HTC 寰拓科技股份有限公司
東莞行特電子有限公司

TITLE		RJ45 10P8C 2PORTS W/LED	
PART NO.		PJ-C2-BX02-E1054-1	