

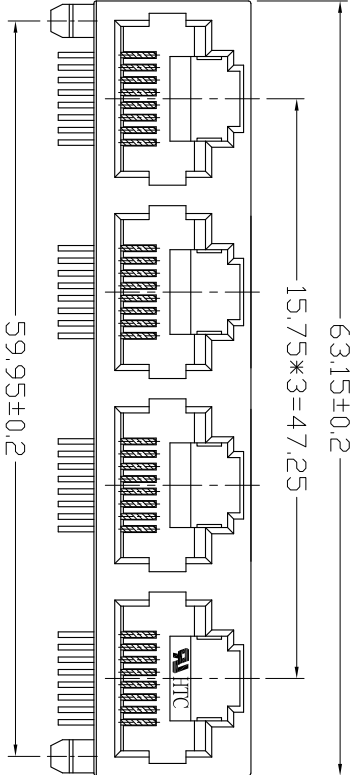


PCB LAYOUT TOP VIEW  
Thickness=1.6mm or 1.2mm

**SPECIFICATION:**  
**Electrical:**  
Current Rating: 1.5Amp max @25℃  
Voltage Rating: 150VAC max  
Insulation Resistance: 500 megohms min  
Contact Resistance: 30 milliohms max  
Withstanding Voltage: 1500 VAC  
**Mechanical:**  
Durability: 5000 Cycles  
Operating Temperature: -40℃~+70℃  
Storage Temperature: -50℃~+75℃  
Contact Normal Force: 100g Minimum  
**Material:**  
Housing: High Temperature Thermoplastic  
UL94V-0, PA6T  
Contact: 0.45mm Dia Phosphor Bronze  
Plated Gold Over Ni  
Solderability: 245±5℃, 5±0.5sec  
Resistance to solder: 260±5℃, 10±1sec  
UL No: E234095

Part No.:

PJ-L4-FY00-E0416-1

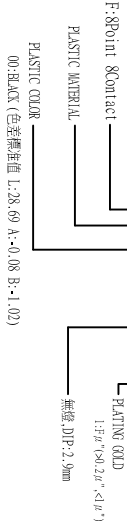

|                                      |           |           |       |            |       |          |                                 |
|--------------------------------------|-----------|-----------|-------|------------|-------|----------|---------------------------------|
| Drawing No: PJ-L4-FY00-E0416-1-A0151 | REVISIONS | TOLERANCE |       | SIGNATURES |       | DATE     | HTC<br>寰拓科技股份有限公司<br>東莞行特電子有限公司 |
|                                      |           | 'ANGLE    | ±0.5° | DESIGN:    | samir | 21.11.30 |                                 |
|                                      |           | .X        | ±0.25 |            |       |          |                                 |
|                                      |           | .XX       | ±0.15 | CHECKED:   |       |          |                                 |
|                                      |           | .XXX      | ±0.10 |            |       |          |                                 |

| REV | ECD | DESCRIPTION | DATE | BY | SHEET |      | APPROVAL: | SCALE | UNIT | REV  | TITLE    | MODULAR JACK<br>8P8C 4PORTS |
|-----|-----|-------------|------|----|-------|------|-----------|-------|------|------|----------|-----------------------------|
|     |     |             |      |    | 1     | OF 1 |           |       | mm   | A/01 | PART NO. | PJ-L4-FY00-E0416-1          |